


# Tender specifications

for flexyPage lift multimedia displays

Short version

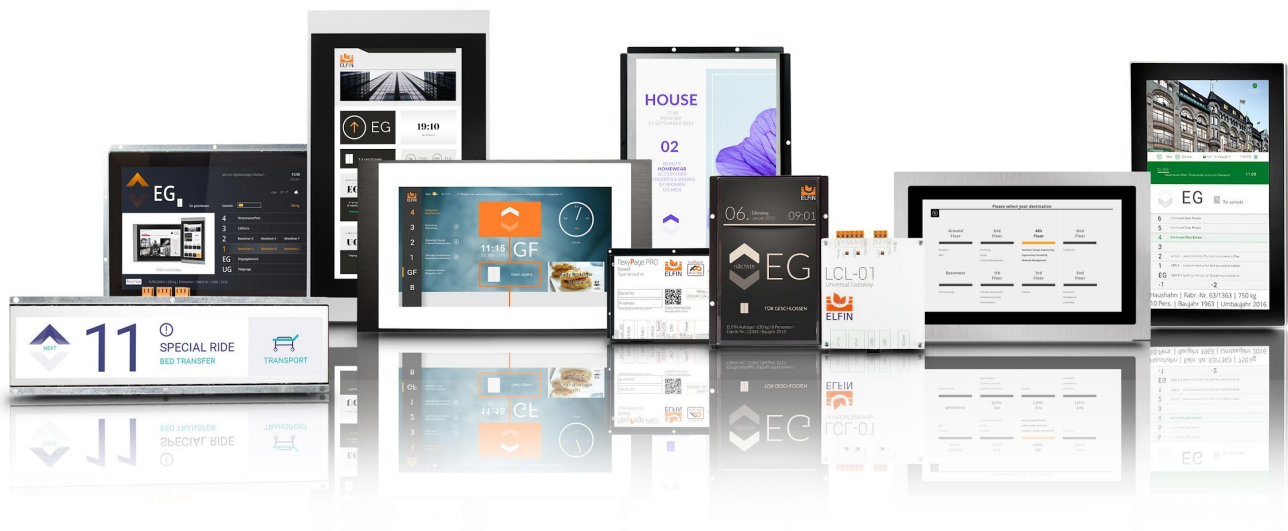

## In short

- Support of CANopen-Lift CiA-417
- Industrial-quality displays, lifetime of at least 50.000 h
- Viewing angle >170° vertically and horizontally
- Use in continuous operation 24/7
- Brightness min. 250 nit, dimmable
- Gradual energy saving modes
- Fanless design
- Flush mounting
- Design and contents of the screen design can be changed by the operator using a standard browser
- Secure remote configuration over the Internet by technicians and operators
- Time- and event-controlled display of lift data and multimedia data on one screen
- Call input via capacitive glass touch screen, input of the landing calls, visual and acoustical acknowledgment of calls, floor encryption via PIN entry, determination of priorities and assignment of car doors for the calls
- Secure, multi-level rights management system for access to parameters and content depending on the user's authorization level with at least three authorization levels for technicians, screen designers and content managers

## Barrier-free 2-sense emergency call

Please also note the tender specifications for the barrier-free 2-sense emergency call according to ASME A17.1-2019

<https://flexypage.de/en/tender-spec-2sc>

# Contact

Do you have questions or comments? We are happy to help.

## Contact partner

### Central office

Tel.: +49 (221) 6778932-0

Fax: +49 (221) 6778932-2

[info@elfin.de](mailto:info@elfin.de)

## Management

### Jörg Hellmich

Managing Director

Tel.: +49 (221) 6778932-0

[joerg.hellmich@elfin.de](mailto:joerg.hellmich@elfin.de)

## flexyPage products

### Sales

Tel.: +49 (221) 6430816-2

[sales@flexyPage.de](mailto:sales@flexyPage.de)

[Contact form](#)

### Technical support

Tel.: +49 (221) 6430816-3

[support@flexyPage.de](mailto:support@flexyPage.de)

[Contact form](#)